



Rancon 1634 **PRODUCT CONDITIONER**



- The Ranco product conditioner utilizes a single rotor with steel fingers. A bar grid is located below the rotor.
- The free flowing product passes through the grid while the lumps are conditioned by the fingers.
- An optional perforated screen is also available for more precise conditioning.
- The sides of the unit are hinged to allow easy access for cleaning or to change to the screen or grate.
- The unit is powered by a 10 HP motor. Capacity of the unit depends on the product being run thru the unit and the amount of conditioning required.
- Overall dimensions of the conditioner are 20"x38"x17" high. The inlet is 16"x34".
- The unit is constructed of mild steel or stainless steel with a stress-proof rotor shaft. The companion flange is designed to be connected to the outlet of a hopper.


TIME PROVEN



Manufacturing Quality Fertilizer Handling Equipment For Over 30 Years.

Rancon 1634

PRODUCT CONDITIONER

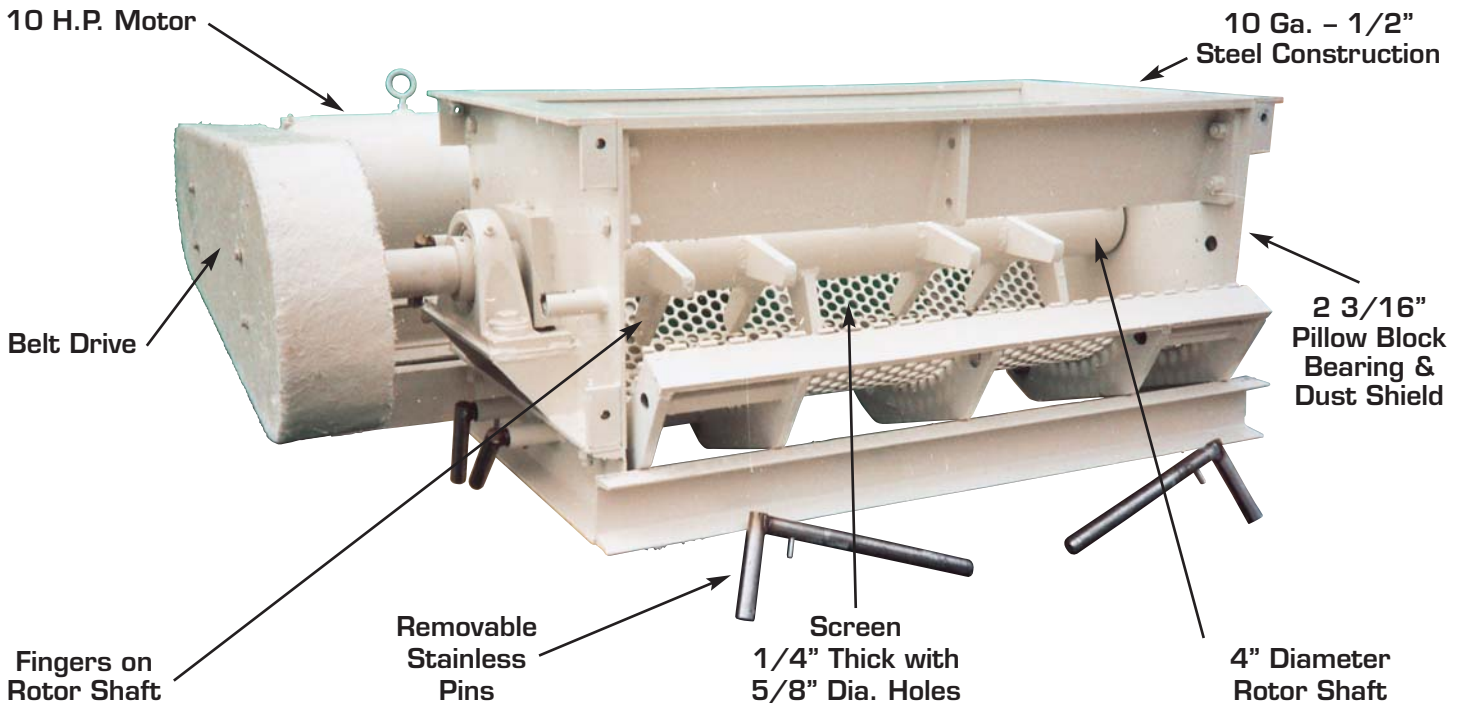

Bar Grate


Both the bar grate and screen are designed as split units so they can be removed easily. Both units can be swung partially open by removing two stainless pins for easy clean out.




Screen



SPECIFICATIONS

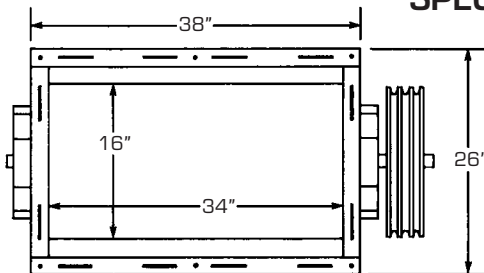

Dimensions: 49" square area required
17 1/2" high
Inlet opening 16" x 34"

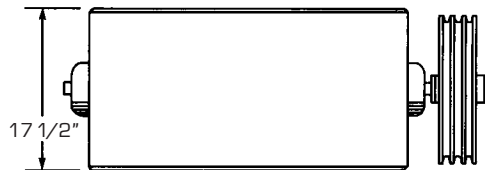

P.O. Box 329
Sioux Rapids, Iowa 50585
Phone: 712-283-2525